













ACESSÓRIOS SPIRO

	UNIÃO MACHO / FÊMEA (SPU e SPUF)	UNIÃO FLEXÍVEL (SPUF)	SAÍDA DE PAREDE (GOLA) (SPG)	CURVA A 90° (SPC90)	CURVA A 45° (SPC45)
Ø D (mm)					
80					
100					
125					
150					
160					
200					
250					
300					
315					
355					
400					
450					
500					
560					
600					
630					
710					
800					

	TAMPO (SPTA)	TAMPO COM REDE (SPTR)	BICO DE PATO C/ REDE – 45° (SPBP)	ABRACADEIRA COM BORRACHA (SPAB)	REGISTO SEM BORRACHA (SPR)	REGISTO COM BORRACHA (SPRB)
Ø D (mm)						
80						
100						
125						
150						
160						
200						
250						
300						
315						
355						
400						
450						
500						
560						
600						
630						
710						
800						

ACESSÓRIOS


REDUÇÕES CONCÊNTRICAS (SPRC \varnothing D \varnothing D1)

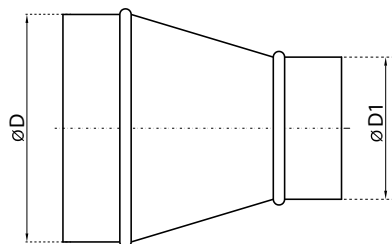

Ø D (mm)	Ø D1 (mm)								
	80	100	125	150	160	200	250	300	315
100									
125									
150									
160									
200									
250									
300									
315									
355									
400									
450									
500									
560									
600									
630									
710									
800									

Ø D (mm)	Ø D1 (mm)							
	355	400	450	500	560	600	630	710
400								
450								
500								
560								
600								
630								
710								
800								

TÊS A 90° (SPTøDøD1)

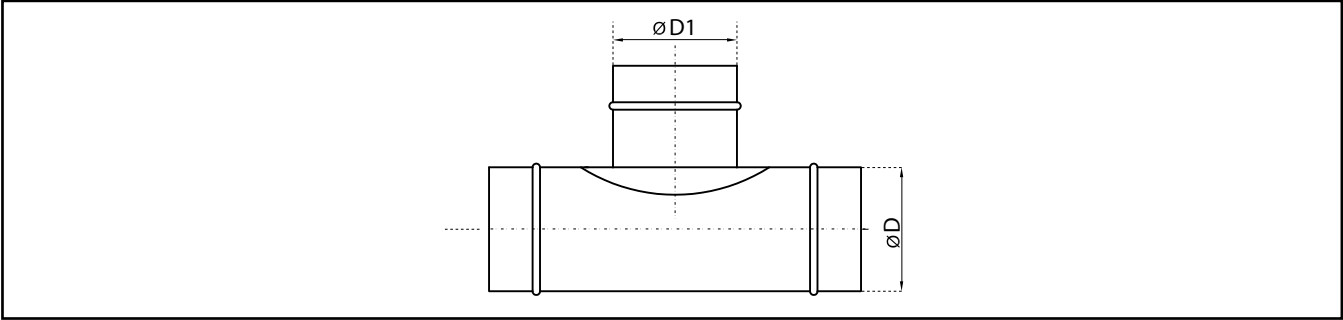


Ø D (mm)	Ø D1 (mm)								
	80	100	125	150	160	200	250	300	315
100									
125									
150									
160									
200									
250									
300									
315									
355									
400									
450									
500									
560									
600									
630									
710									
800									

Ø D (mm)	Ø D1 (mm)								
	355	400	450	500	560	600	630	710	800
355									
400									
450									
500									
560									
600									
630									
710									
800									

ACESSÓRIOS


CANHÃO A 90° ou 45° (SPCA90ØD1ØD ou SPCA45ØD1ØD)

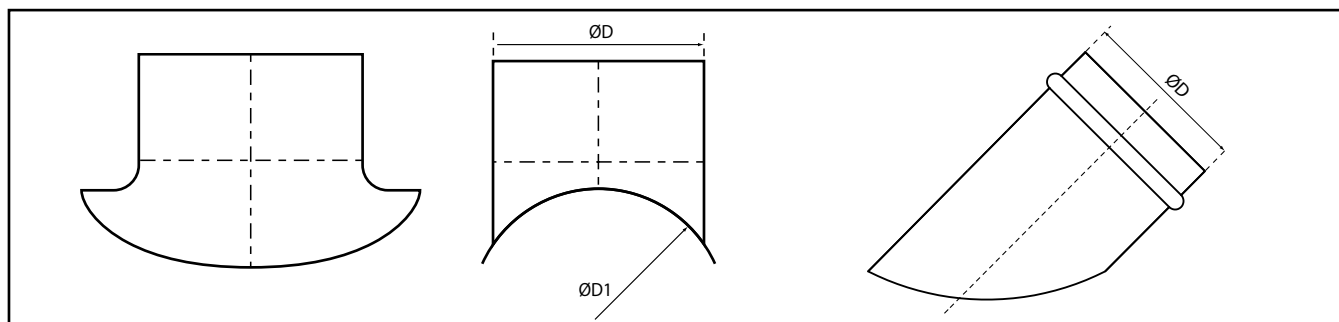

Ø D (mm)	CANHÃO A 90°	CANHÃO A 45°
100		
125		
150		
160		
200		
250		
300		
315		
355		
400		
450		
500		
560		
600		
630		
710		
800		

Nota: no momento da encomenda, informar o diâmetro da conduta D1. Exemplos: SPCA90250250, SPCA90250200, SPCA90250160, etc.

TRANSFORMAÇÕES PARA VENTILADORES DE COBERTURA

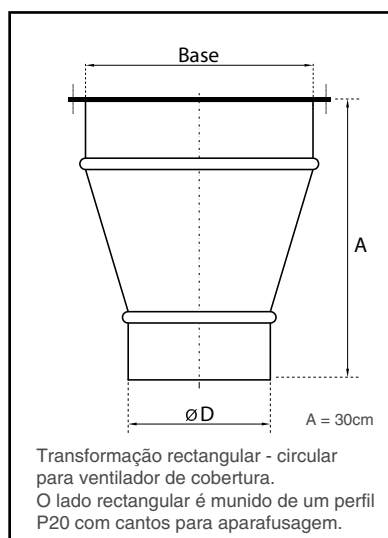

Ventilador EMMOS	Base (mm)	Ø D (mm)	Preço
028/032	445x445	250	
036	445x445	315	
040/045/050	565x565	400	
056/063	800x800	500	
071/080	910x910	630	

Ventilador DVS / DHS	Base (mm)	Ø D (mm)	Preço
225	335x335	250	
310/311	435x435	315	
355/400	595x595	400	
450/499/500	665x665	450 ou 500	
630	939x939	630	
710	1035x1035	630	