

KVK	PVP €
125	284,43
160 M	295,29
160 L	311,52
200	435,86
250	515,31
315 M	882,22
315 L	959,50
355	970,97
400	988,80
500	2037,07



ACESSÓRIOS	PVP €
REE 1	35,49
REE 2	42,66
REE 4	76,59
RE 1,5	91,47
REU 3	205,17
REU 5	237,78
REU 7	306,54
RTRE 1,5	131,02
RTRE 3	145,85
RTRE 7	244,73
S-ET 10	47,31
RTRD 7	425,03
REV-3POL/03 ON/OFF	44,25
REV-5POL/05 ON/OFF	49,65
REV-5POL/07 ON/OFF	50,67

**KVK**



- Caudal de 0 a 5000 m<sup>3</sup>/h
- Podem ser instalados em qualquer posição
- Isolamento de 50mm de lã mineral
- Montagem exterior ou interior
- Velocidade regulável
- Baixo nível sonoro
- Fácil acesso
- Pás avançadas

## Curvas caudal/pressão

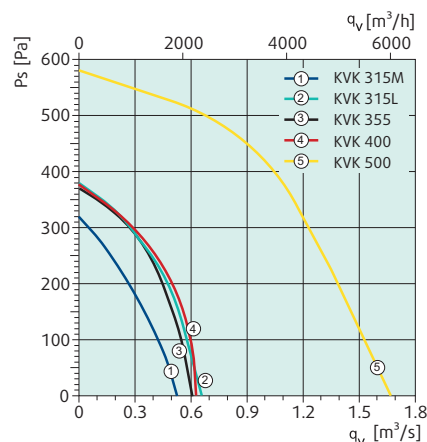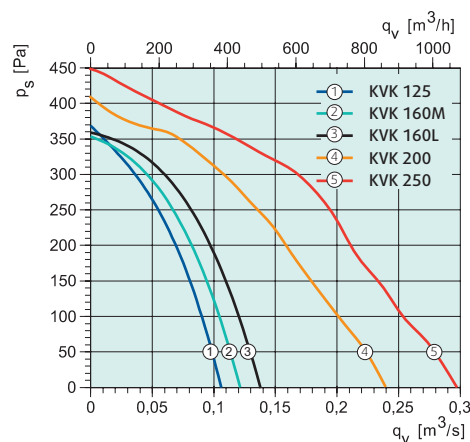


## Características técnicas

KVK		125	160M	160L	200	250	315M	315L	355	400	500
Artigo nº		2430	2433	2434	27427	27428	27429	27608	27609	27619	27987
Tensão/Fase	V/Ph	230/1	230/1	230/1	230/1	230/1	230/1	230/1	230/1	230/1	400/3
Potência	W	92.7	111	134	191	266	268	448	482	485	1468
Intensidade	A	0.409	0.48	0.59	0.837	1.18	1.18	1.96	2.1	2.15	3.39
Caudal máximo	m³/h	382	443	497	857	1037	1814	2315	2228	2243	6008
R.p.m.	min <sup>-1</sup>	1978	2062	2519	2422	1846	1230	1072	1003	912	1370
Temp. máx. do ar	°C	68	70	70	70	40.7	70	49.2	38.7	40	72
Pressão Sonora a 3 m	dB(A)	38.1	38.8	39.1	39.4	40.2	39.5	38.4	44.3	39.2	50.9
Peso	kg	11	11.3	11.8	14.6	16.1	33.2	32.4	32.7	32.4	72
Grau de protecção, motor	IP	44	44	44	44	44	54	22	22	22	54
Variadores electrónicos		REE1	REE1	REE1	REE1	REE2	REE2	REE4	REE4	REE4	-
Transf. 5 posições		RE 1,5	RE 1,5	RE 1,5	RTRE 1,5	RTRE 1,5	RTRE 3	RTRE 3	RTRE 3	RTRE 3	RTRD 7

## Acessórios



FK



SG



RSK



LDC



FGR-FFR



RE



REE



REV

**Dimensões (mm)**

KVK	A	B	C	D	E	F	G	ØH	I
<b>125</b>	230	266	151	114	367	415	464	125	40
<b>160</b>	230	266	134	132	367	415	464	160	40
<b>200</b>	340	345	191	193	395	395	440	200	20
<b>250</b>	380	385	198	228	460	400	490	250	40
<b>315</b>	540	545	328	256	520	570	655	315	40
<b>355</b>	540	545	328	256	520	570	655	355	40
<b>400</b>	540	545	628	256	520	570	680	400	50
<b>500</b>	750	680	400	355	710	718	850	500	80

